

RED LED CHICAGO APPROVED COMBO EXIT SIGN | ADJUSTABLE LAMP HEADS

Code: CHCO-R



City of Chicago approved LED Combo Exit sign with steel housing and glass face



FEATURES

- UL 924, NEC, OSHA and NFPA 101 Life Safety Code
- City of Chicago approved
- Now uses LEDs for improved energy efficiency
- Open-face glass panel, silk-screen letters
- 20 gauge steel housing with white powder coat finish
- Mounting Canopy for Side Mount
- Integrated solid state system, lock out, low voltage battery cutoff, dual voltage 120/277

WARRANTY INFORMATION

Any component that fails due to manufacturer's defect is guaranteed for 1 year. The warranty only covers products installed and maintained in accordance with the instructions provided by their respective manufacturer and no warranty is made with respect to any of our products that are otherwise installed or maintained. For full warranty details, visit our Warranty Section.

Conformance to Codes and Standards

The CHCO-R series is UL listed and meets or exceeds the following: UL 924, NEC, OSHA and NFPA 101 Life Safety Code requirements.

ORDERING INFORMATION

Series	Letter Color	Housing Color	Operation Type	Signage	Arrows
CHCO	R (Red)	W (White)	BB (Battery Backup)	EXIT	Left
				STAIRS	Right
					Left and Right

CONSTRUCTION

The CHCO-R series is constructed from durable 20-gauge steel with a white finish. Features a heat-tampered, impact-resistant glass lens.

ILLUMINATION

The CHCO-R Combo Exit Sign offers two adjustable metal lamp LED heads: 3.6VDC 1.8W(2).

ELECTRICAL COMPONENTS

Universal input 100-300 VAC 50HZ operation. LED display indicates AC/ON. An external push button test switch with battery backup units allows maintenance personnel to quickly determine the operational status of the unit.

EMERGENCY OPERATION

Upon failure of the normal utility power, an internal solidstate transfer switch automatically provides uninterrupted emergency operation for at least 90 minutes. The fully automatic solid-state, two-rate charger initiates battery charging to recharge a discharged battery in 24 hours.

BATTERY - BATTERY BACKUP

The CHCO-R series is designed with a maintenance-free battery that provides a minimum emergency duration of 90 minutes. Recharge time of the battery is 24 hours.

OPERATIONAL TEMPERATURE

Temperature Ratings


Battery Backup

10°C to 40°C / 50°F to 104°F

INSTALLATION

The CHCO-R Combo Exit Sign is suitable for wall and side mount via steel mounting canopy.

DIMENSIONS

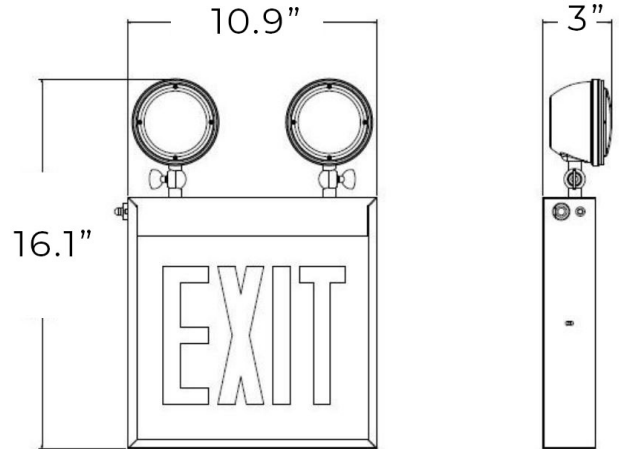

Weight : 10.00 lb

3170 Scott St, Vista, CA 92081
Phone: 877-352-3948 | Fax: 877-352-3949
info@exitlightco.com