

LOW-LEVEL ALL LED EXIT LIGHT COMBO

Code: COMBOLO



FEATURES

- UL 924, NEC and NFPA 101 Life Safety Code, OSHA, Local and State Codes
- Listed for damp location
- 120 or 277 VAC operation
- Injection-molded, VO flame retardant, high impact housing
- Charge rate/power "ON" LED indicator light
- 90 Minute battery backup time

WARRANTY INFORMATION

Any component that fails due to manufacturer's defect is guaranteed for 1 year. The warranty only covers products installed and maintained in accordance with the instructions provided by their respective manufacturer and no warranty is made with respect to any of our products that are otherwise installed or maintained. For full warranty details, visit our Warranty Section.



Conformance to Codes and Standards

The COMBOLO series is UL listed and meets or exceeds the following: UL 924, NEC and NFPA 101 Life Safety Code requirements.

ORDERING INFORMATION

Series	Letter Color	Housing Color	Operation Type	Options
COMBOLO	R (Red)	W (White)	BB (Battery Backup)	Title 20 CEC Compliant
	G (Green)	B (Black)		

CONSTRUCTION

The COMBOLO Low Level Combo LED Exit Sign is constructed from injection molded, 5VA flame retardant, high impact thermoplastic housing. Easy snap-out chevron directional indicators (Arrows).

ILLUMINATION

The COMBOLO Low Level Combo LED Exit Sign illumination is achieved by using long-lasting, efficient ultra bright red or green LEDs for the EXIT portion and white LEDs for the emergency light portion. Color-matched diffuser eliminates hot spots and striations, providing optimal light output.

ELECTRICAL COMPONENTS

Dual voltage input 120/277 VAC operation. LED display indicates AC/ON. An external push button test switch with battery backup units allows maintenance personnel to quickly determine the operational status of the unit. Features unique bi-color LED indicator that alerts occupant on battery condition (Green-Normal Status Red-Check Battery). Unit offers surge protected, solid state circuitry.

EMERGENCY OPERATION

Upon failure of the normal utility power, an internal solid-state transfer switch automatically provides uninterrupted emergency operation for at least 90 minutes. The fully automatic solid-state, two-rate charger initiates battery charging to recharge a discharged battery in 24 hours.

BATTERY - BATTERY BACKUP

The COMBOLO Low Level Combo LED Exit Sign is designed with a maintenance-free 3.6V NiCad battery that provides a minimum emergency duration of 90 minutes. Recharge time of the battery is 24 hours.

OPERATIONAL TEMPERATURE


Temperature Ratings

Standard Option	0°C to 50°C / 32°F to 122°F
-----------------	-----------------------------

INSTALLATION

The COMBOLO Low Level Combo LED Exit Sign is suitable for surface wall installation. Knock-out chevrons for customized egress signage.

DIMENSIONS

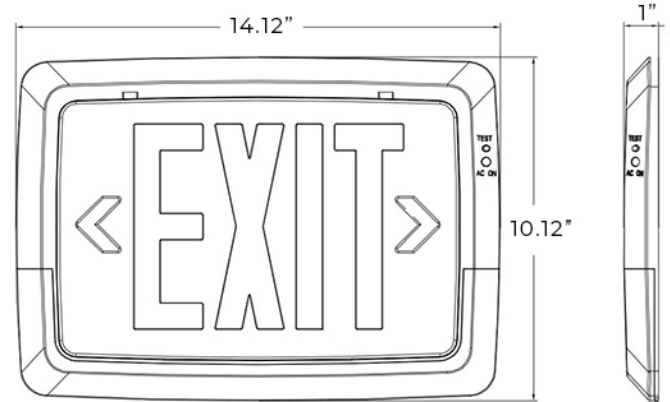

Weight : 0.00 lb

ELECTRICAL INFORMATION

The COMBOLO series combines a low profile traditional design and dependable LED lighting illumination for an attractive and affordable solution.

3170 Scott St, Vista, CA 92081
Phone: 877-352-3948 | Fax: 877-352-3949
info@exitlightco.com