



This wet location emergency light provides a stylish and practical solution to your outdoor emergency lighting needs.



FEATURES

- UL 924, NEC, OSHA and NFPA 101 Life Safety Code
- Wet Location Rated
- Dual 120 or 277 VAC input
- Fully gasketed corrosion-resistant enclosure
- Includes two high output LED lamps
- Solid state charging circuit
- Short circuit and overload protection on DC output circuit
- Low voltage disconnect (LVD)
- Sealed momentary push-to-test switch

WARRANTY INFORMATION

Any component that fails due to manufacturer's defect is guaranteed for 1 year. The warranty only covers products installed and maintained in accordance with the instructions provided by their respective manufacturer and no warranty is made with respect to any of our products that are otherwise installed or maintained. For full warranty details, visit our Warranty Section.

Conformance to Codes and Standards

The EL-WETLED series is UL listed and meets or exceeds the following: UL 924, NEC, OSHA and NFPA 101 Life Safety Code requirements.

ORDERING INFORMATION

Series	Housing Color	Operation Type
EL-WETLED	W (White)	BB (Battery Backup)
		HTR (Internal Heater)

CONSTRUCTION

The EL-WETLED Emergency Light is constructed from injection molded, high impact V-O flame retardant thermoplastic housing. Polycarbonate lens is UV stabilized but some discoloration may occur over time if installed in direct sunlight. White housing is standard.

ILLUMINATION

Emergency lamps use long-lasting, energy efficient ultra bright white LEDs. 12 high output LEDs per head.

ELECTRICAL COMPONENTS

Dual voltage input 120/277 VAC operation. LED display indicates AC/ON. An external push button test switch with battery backup units allows maintenance personnel to quickly determine the operational status of the unit. Unit offers surge protected, solid state circuitry.

EMERGENCY OPERATION

Upon failure of the normal utility power, an internal solidstate transfer switch automatically provides uninterrupted emergency operation for at least 90 minutes. The fully automatic solid-state, two-rate charger initiates battery charging to recharge a discharged battery in 24 hours.

BATTERY - BATTERY BACKUP

The EL-WETLED series is designed with a maintenance-free 3.6V 900mAh NiCad battery that provides a minimum emergency duration of 90 minutes. Recharge time of the battery is 24 hours.

PHOTOMETRICS

Standard mounting height of 7.5ft illuminates 1 footcandle (FC) spaced at 24ft for a 3ft path of egress.


OPERATIONAL TEMPERATURE

Battery Backup Model: 50°F (10°C) to 104°F (40°C)
Internal Heater Model: -4°F (-20°C) to 122°F (50°C)

INSTALLATION

The EL-WETLED Wet Listed Emergency Light is suitable for surface wall and ceiling mounting via included canopy. Quick connect installation design allows for quick and easy installation.

DIMENSIONS

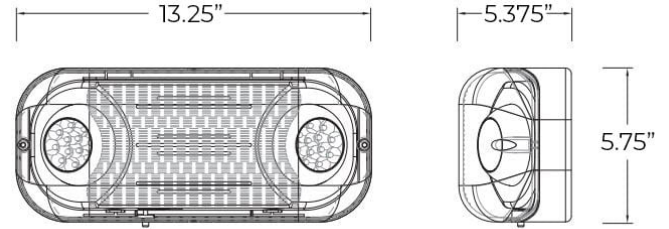

Weight : 4.00 lb

