

EXTRA THIN LED EXIT SIGN - WHITE HOUSING

Code: LEDT



Compatible Battery: BAA-12

FEATURES

- UL and cUL Listed
- Rated for Damp Locations
Injection-molded, high-impact, UL94 V-0 thermoplastic construction
- 120-277 VAC operation
Universal mounting pattern knock-out in back plate for J-box mounting
- Knock-out left/right arrows
- Test switch and charge indicator
Innovative and easy installation in minutes

WARRANTY INFORMATION

Any component that fails due to manufacturer's defect is guaranteed for 1 year. The warranty only covers products installed and maintained in accordance with the instructions provided by their respective manufacturer and no warranty is made with respect to any of our products that are otherwise installed or maintained. For full warranty details, visit our Warranty Section.

Conformance to Codes and Standards

The LEDT Thin Exit Sign series is UL listed.

ORDERING INFORMATION

Series	Letter Color	Housing Color	Operation Type	Sides
LEDT	R (Red)	W (White)	BB (Battery Backup)	S (Single Sided)
	G (Green)			

CONSTRUCTION

The LEDT series is constructed from injection-molded, high-impact, engineering-grade, UV-stabilized, UL 94 V-0 thermoplastic. White housing is standard.

ILLUMINATION

Long-Lasting, efficient Red or Green LEDs.

ELECTRICAL COMPONENTS

Dual voltage input 120/277 VAC operation. LED display indicates AC/ON. An external push button test switch allows maintenance personnel to quickly determine the operational status of the unit.

EMERGENCY OPERATION

Upon failure of the normal utility power, an internal solid-state transfer switch automatically provides uninterrupted emergency operation for at least 90 minutes. The fully automatic solid-state, two-rate charger initiates recharging a discharged battery within 24 hours.

BATTERY - BATTERY BACKUP

The LEDT Thin Exit Sign series is designed with a maintenance-free 1.2V 1000mAh NiMH battery that provides an emergency duration of 90 minutes. Recharge time of the battery is 24 hours.

OPERATIONAL TEMPERATURE

Temperature Ratings


Standard Option

0°C to 40°C / 32°F to 104°F

INSTALLATION

The LEDT is suitable for surface wall, side, and top mounting via included canopy. Snap together design allows for quick and easy installation. Knock-out chevrons for customized egress signage. The LEDT exit sign can be installed in damp location areas.

DIMENSIONS

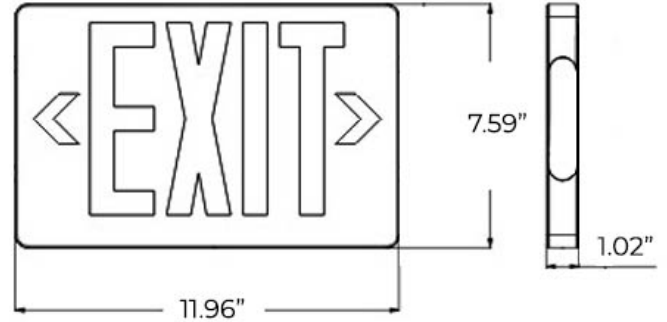

Weight : 5.00 lb

3170 Scott St, Vista, CA 92081
Phone: 877-352-3948 | Fax: 877-352-3949
info@exitlightco.com