



# 100' VIEW PHOTOLUMINESCENT EXIT SIGN | RED OR GREEN HOUSING | INDOOR/OUTDOOR RATED

Code: PA100



A Power Free Photoluminescent Exit Sign with 100' Visibility.



## FEATURES

- UL 924, OSHA and NFPA 101 Life Safety Code
- Listed for wet location
- LEED points qualified
- Explosion-proof, weatherproof.
- 7" Letter Height
- No electricity, no batteries
- Ceiling, side or wall mounting - mounting bracket included with double sided units
- Life Expectancy: 25+ years
- No future hazmat disposal needed

## WARRANTY INFORMATION

Any component that fails due to manufacturer's defect is guaranteed for 1 year. The warranty only covers products installed and maintained in accordance with the instructions provided by their respective manufacturer and no warranty is made with respect to any of our products that are otherwise installed or maintained. For full warranty details, visit our Warranty Section.

## Conformance to Codes and Standards

The PA100 series is UL listed and meets or exceeds the following: UL 924, NFPA Life Safety Code 101 and OSHA requirements: International Building and Fire Code 2009, 2012, 2015. Listed for LED Lighting.

## ORDERING INFORMATION

Series	Sign Color	Sides
PA100	R (Red)	S (Single Sided)
	G (Green)	DS (Double Sided)

## CONSTRUCTION

The PA100 Series has a thin, low profile construction with ABS plastic paneling and photoluminescent lettering. This wire-free exit sign is high durability explosion proof and suitable for wet locations.

## ILLUMINATION

The PA100 Series has a viewing visibility of 100 feet. Provides consistent, uniform illumination.

## ELECTRICAL COMPONENTS

The PA100 Series does not use nor requires any type of electrical components.

## EMERGENCY OPERATION

Upon failure of the normal utility power the PA100 exit sign will provide at least 90 minutes of illumination. \*The sign must be charged for a minimum of 60 minutes to become fully operational.


## Operational Temperature

The PA100 Series exit sign can operate in temperatures as low as -20°F and as high as 150°F.

## INSTALLATION

Surface, flag or ceiling mounted (hardware included). Before installation it must be determined that there is a minimum of 5 FC of LED or fluorescent light on the face(s) of the sign at all times during building occupancy. The sign can be used in both high-level and low-level applications. (Conduit bracket sold separately.)

## DIMENSIONS

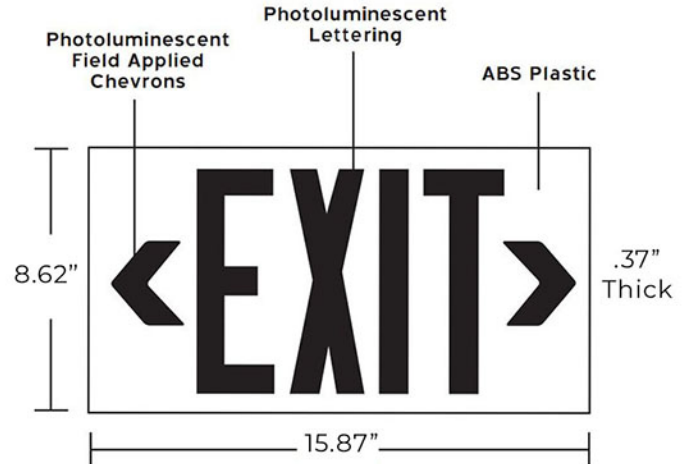

Weight : 3.00 lb

---

3170 Scott St, Vista, CA 92081  
Phone: 877-352-3948 | Fax: 877-352-3949  
info@exitlightco.com